


# READER SCANNER

# SCN 6010

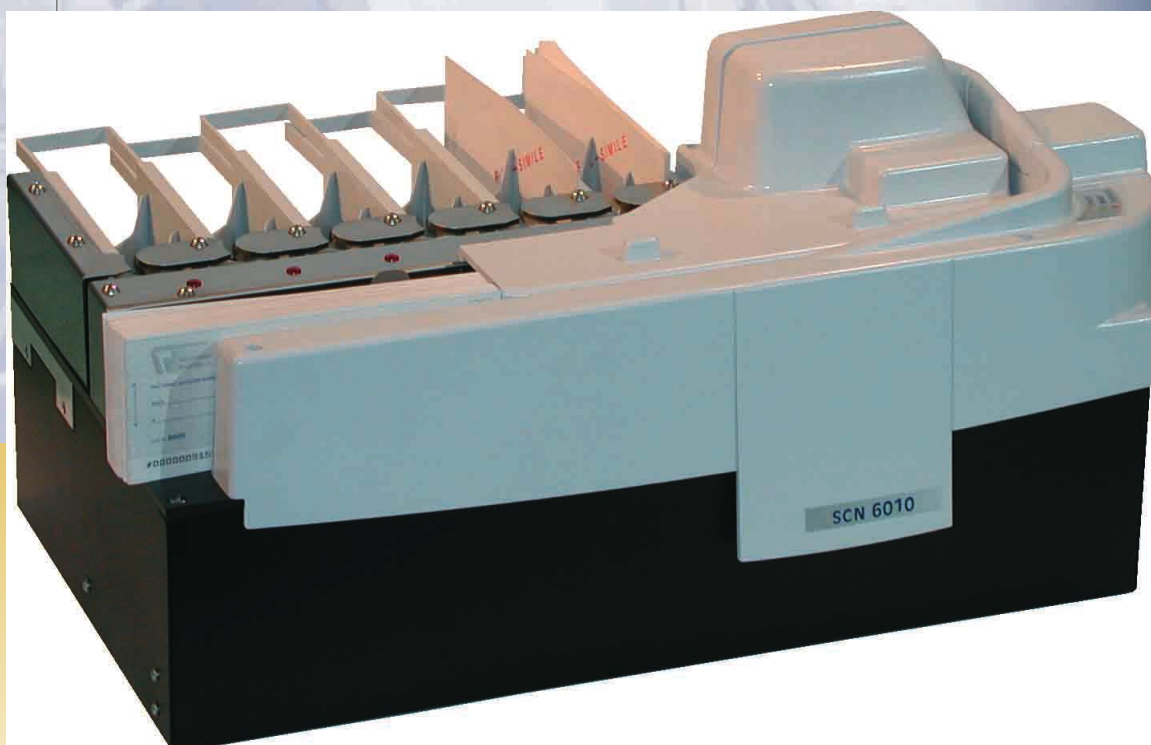

**MICR and OCR  
codeline reader**  
**Front and rear  
image capture**  
**Automatic  
document feeding**  
**Six collecting  
compartments**  
**Front and rear  
ink jet printheads**

SCN 6010 is a peripheral for the banking and financial documents handling which consists of MICR/OCR codeline reader and a front/rear scanning unit for images capture.

The transport speed (up to 150 dpm) and feeder capacity are ideal for back and middle office use.

It is equipped with a rear ink jet printer for variable endorsement.

Other optional front or rear lines are available. The computer connection is made by a USB2 interface.

READER  
SCANNER

## WALTHER ITALIA SPA - TECHNICAL SHEET SCN 6010

**BASIC UNIT**

- Automatic documents feeding (up to 450 DOCS capacity) with double thickness detection
- Front and rear image capture
- Six sorting pockets for processed documents (125 docs. each)
- MICR CMC7/E13B read head

**OPTIONS**

- OCR read head
- Rolling Stamp (front or rear)
- Front, or rear, ink-jet printhead for endorsing
- Intelligent endorsement and sorting based on codeline (sorting tables can be downloaded on the unit)
- Colour scanning
- Performances: up to 150 docs/min
- Available additional sorting modules, up to 24 pockets (nr. 3 sorters max)

**DOCUMENT SPECIFICATIONS**

- Length: 105-240 mm.
- Height: 60-108 mm. for scanning [Image height: max 108 mm.; the unit is able to handle higher sized documents.]
- Image resolution: 100 or 200 dpi, with 256 shades of gray, Tiff G4, Jpeg
- weight: 70-120 g/m<sup>2</sup>

**HOST CONNECTIONS**

USB2 interface

**POWER SUPPLY**

Mains & power: 110/240 Vac 50÷60 Hz, 60VA  
ON/OFF switch on the reader, rear side

**DIMENSIONS AND WEIGHT**

Dimensions: mm. 540 x 282 x 260  
Weight: Kgs. 15

**ENVIRONMENTAL CONDITIONS**

Operative conditions: 15 ÷ 35°C 20 ÷ 80% R.H.  
Storage: 0 ÷ 45°C 5 ÷ 95% R.H.  
Transport: -15 ÷ + 55°C 20H max

**HOMOLOGATIONS & MARKS**

Standards CE : EN 55022 class B /  
EN 61000-3-2 / EN 61000-3-3 / EN 55024  
Safety: EN 60950

**PAPER HANDLING**

- Transport speed: 800 mm./sec.